


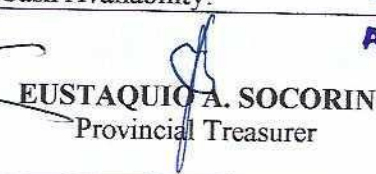


PURCHASE REQUEST
Province of Davao

APPENDIX F

Department: Office of the Provincial Agriculturist Division: Crop Division Section: Facility Section	PR No. _____ SAR No. _____ OBR No. _____	Date: <u>April 27, 2020</u> Date: _____ Date: _____
---------------------------------------------------------------------------------------------------------------	------------------------------------------------	-----------------------------------------------------------

Item No.	Quantity	Unit of Issue	Item Description	Estimated Unit Cost	Estimated Total Cost
Tubigon Plant Nursery Infra-Development Construction of Storage Room/Bodega					
Flooring					
1.	61	Bags	Portland cement (approved brand)	P 280.80	P 17,128.80
2.	7	Cu. M.	Sand (approved source)	1,404.00	9,828.00
3.	8	Cu. M.	Gravel (approved source)	1,404.00	11,232.00
4.	31	Pcs	10 mm corr. G.I. bar	201.60	6,249.60
Concrete footing & column					
5.	40	Bags	Portland cement (approved brand)	280.80	11,232.00
6.	3	Cu. M.	Sand (approved source)	1,404.00	4,212.00
7.	4	Cu. M.	Gravel (approved source)	1,404.00	5,616.00
8.	53	Pcs	16 mm corr. G.I. bar	493.20	26,139.60
9.	50	Pcs	10 mm corr. G.I. bar	201.60	10,080.00
10.	1	LS	Formworks	5,000.00	5,000.00
CHB wall					
11.	46	bags	Portland cement (approved brand)	280.80	12,916.80
12.	4	Cu.m.	Sand (approved source)	1,404.00	5,616.00
13.	2	Cu.m.	Gravel (approved source)	1,404.00	2,808.00
14.	482	pieces	CHB 4"x 8"x16"	23.00	11,086.00
15.	35	pieces	12 mm RSB	316.80	11,088.00
Cement board wall					
16.	33	pieces	Cement board 4'x8'x3.5mm 9double wall	540.00	17,820.00
17.	56	pieces	Furring channel double 19mm x50mmx5m	144.00	8,064.00
18.	1000	pieces	Tick screw 1"	1.00	1,000.00
19.	24	pieces	10mm plain round bar	264.00	6,336.00
20.	15	meter	Aluminum screen 0.5 cm x0.5 cm	420.00	6,300.00
Roofing & Doors					
21.	20	Kg.	Welding rod	132.00	2,640.00
22.	10	pieces	Steel plate 8" x8" x3mm	480.00	4,800.00
23.	17	pieces	Channel Bar 2"x3"x 6m-truss	2,844.00	48,348.00
24.	10	pieces	Channel Bar 2"x 4"x 6m- wall beam	2,844.00	28,440.00
25.	47	pieces	B.I.C-purlins 2"x3"x 1.3mm	880.80	41,397.60
26.	27	LNM	Ordinary ridge roll, GA24 (0.701mmx2.44m)	136.80	3,693.60
27.	45	sheets	GI corrugated sheets (8'x36") gage 26	375.00	16,875.00
28.	1500	pieces	2 1/2" tick screw	1.56	2,340.00
29.	2	gallon	Vulca zeal	840.00	1,680.00
30.	15	kg	Tie Wire No.16	84.00	1,260.00
31.	1	unit	Steel roll up door (width 1.8m x2.0m ht.)	36,851.80	36,851.80
32.	1	piece	Door Panel 80cm x 210cm x 40 mm w/ design	4,920.00	4,920.00
33.	1	unit	Door Jamb 2"x 6" for 80cm x 210cm panel	2,280.00	2,280.00
Total Materials				P 385, 278.80	

BY AUTHORITY OF THE GOVERNOR

	Requested by:  LARRY M. PAMUGAS, Ph.D. OIC Office of the Provincial Agriculturist	Cash Availability:  EUSTAQUIO A. SOCORIN Provincial Treasurer	Approved by:  ATTY. KATHYRN F. D. PIQUINTO PROVINCIAL ADMINISTRATOR  ATTY. ARTHUR C. YAP Governor
--	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------