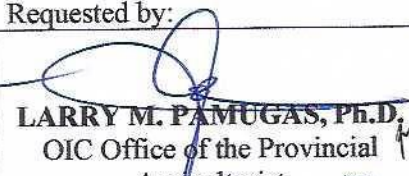
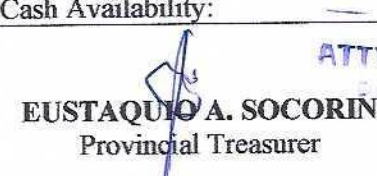



Item No.	Quantity	Unit of Issue	Item Description	Estimated Unit Cost	Estimated Total Cost
Construction of Dormitory with Vermihouse/ Balilihan Provincial Plant Nursery					
Concrete footing w/ column & Concrete stairs & vermi boxes					
1.	45	Bags	Portland Cement (approved brand)	₱ 285.60	₱ 12,852.00
2.	6	Cu. M.	Sand (approved source)	1,140.00	8,640.00
3.	6	Cu. M.	Gravel (approved source)	1,140.00	8,640.00
4.	33	Pieces	12 mm corr. G.I. bar	237.60	7,840.80
5.	20	Pieces	10 mm corr. G.I. bar	164.40	3,288.00
6.	1	LS	Formworks	5,000.00	5,000.00
7.	5	Kg.	Tie Wire No. 16	84.00	420.00
8.	400	Pieces	CHB 4"x8"x16" – stairs & vermi boxes	18.00	7,200.00
Wooden Post, flooring & frame					
9.	192	Bd.ft.	5"x5"x12' Post, gemelina/mahogany	84.00	16,128.00
10.	304	Bd.ft.	2"x6"x8' Girder	66.00	20,064.00
11.	448	Bd.ft.	2"x3"x10' floor beam	66.00	29,568.00
12.	83.33	Bd.ft.	2"x2"x10' floor joist	66.00	5,499.78
13.	12	Pieces	1"x4"x8' Marine plywood – floor sheathing	1,800.00	21,600.00
14.	60	Bd.ft.	2"x3"x10' studs	66.00	3,960.00
15.	136.7	Bd.ft.	2"x2"x10' studs	66.00	9,022.20
16.	72	Bd. Ft.	2"x3"x9' studs	66.00	4,752.00
17.	90	Bd.ft.	2"x2"x9' studs	66.00	5,940.00
18.	15	Pieces	Cement board 4'x8'x6 mm (single wall)	885.60	13,284.00
Trusses and Roofing					
19.	240	Bd.ft.	2"x6"x10' Truss	66.00	15,840.00
20.	96	Bd.ft.	2"x3"x8' diagonal, vertical truss brace	66.00	6,336.00
21.	285	Bd.ft.	2"x3"x10' Purlins	66.00	18,810.00
22.	26.67	Bd.ft.	2"x2"x10' Purlins extension roofing	66.00	1,760.22
23.	80	Bd.ft.	2"x4"x10' Beam	66.00	5,280.00
24.	4	Sheets	GI plain sheet (10'x36") gage 24	216.00	864.00
25.	24	Sheets	GI corrugated sheets (10'x36") gage 26	588.00	14,112.00
26.	1	Gallon	Vulca zeal	840.00	840.00
27.	2	Gallon	Solignum colorless wood preservative	1,920.00	3,840.00
Doors and Windows					
28.	2	Piece	Door Panel 80cm x 210cm x 40mm ordinary	2,400.00	4,800.00
29.	26.67	Bd.ft.	2"x4"x8' Door Jamb	66.00	1,760.22
30.	5	Sq.m.	Jalousie window (clear glass)	1,800.00	9,000.00
31.	53.33	Bd.ft.	2"x4"x8' window jamb	66.00	3,519.78
Decorative Railings, Braces & Wooden					
32.	86.67	Bd.ft.	2"x2"x10' railings	66.00	5,720.22
33.	16.67	Bd.ft.	2"x3"x8' railings	66.00	1,100.22
34.	24	Bd.ft.	2"x2"x8' railings	66.00	1,584.00
35.	64	Bd.ft.	2"x8"x8' wooden stairs	84.00	5,376.00
36.	130	Bd.ft.	2"x3"x10' braces	66.00	8,580.00
37.	20	Pieces	Whole bamboo (at least 3 inches diam.)	300.00	6,000.00
Sub-total A					₱ 298,821.

BY AUTHORITY OF THE GOVERNOR

Signature Printed Name Designation	Requested by:	Cash Availability:	Approved by:
	 LARRY M. PAMUGAS, Ph.D. OIC Office of the Provincial Agriculturist	 EUSTAQUIO A. SOCORIN Provincial Treasurer	 ATTY. ARTHUR C. YAP Governor